


ASSEMBLY AND INSTALLATION INSTRUCTIONS

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Carefully unpack and lay all parts on a clean, level surface.
2. Screw the two central post(H) onto nipple(I) until they are secured and do not come loose.
3. Place the mounting plate(A) on the outlet box and mark the wall according to the location of the mounting hole. Then place 2 plastic anchors on the wall.
4. Attach the mounting plate(A) to the outlet box using two outlet box screws(C). Then use a 2pcs tapping screw to run it through a mounting plate(A) mounting hole and lock it onto a plastic anchor.
5. Determine the length of the chain you need, using pliers to disconnect the extra chain and discard it. Attach one end of the chain to the fixture loop (E) of the fixture with one quick links (G). Attach other end of chain the fixture loop (E) on canopy with one quick links (G).
6. Unwrap supply wire and ground wire and weave them up through the chain. Slip supply wire and ground wire through center hole of fixture loop (E).
7. Make wire connections:
 - Attach ground wire to house ground wire using a wire nut. (Or attach them to the cross bar with a green ground screw).
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.

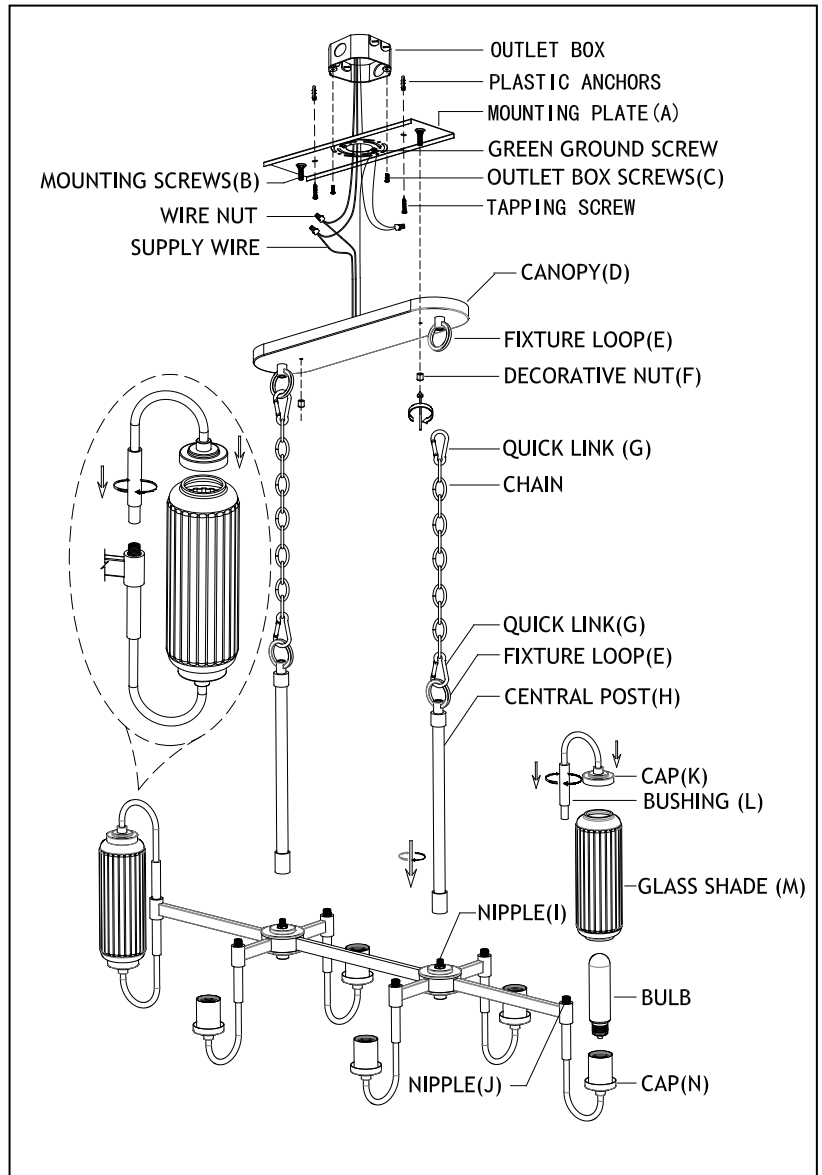

8. Tuck the wire connections neatly into the outlet box. Then attach the canopy (D) to the ceiling, secure with two decorative nut(F).
9. Install bulbs. (Please do not exceed the maximum capacity which is recommended on the fixture.)
10. Insert one end of glass shade (M) into cap (N) then then fasten cap (K) onto the other end of glass shade (M).
11. Secure the glass shade (M) to the caps by tightening the bushing (L).
12. Turn power on at fuse or circuit box.

6615-6-47